



# PLACO® BA 15 1200

Boards



## Product Description

Laminated Gypsum Plasterboard with cardboard on both sides and gypsum plaster core of natural origin with a thickness of 15 mm and width of 1200 mm, manufactured using a continuous lamination process with tapered longitudinal edges.

## Application


Construction of interior drywall systems: wall partitions and self-supporting cladding, continuous ceilings and decorative elements.

## Storage and conservation

Store the boards on flat surfaces and never outdoors, keeping them covered, away from sunlight and rain. Maximum stacking of the boards: 6 pallets.

## Conditions of installation

Consult Placo® Installation Manual.

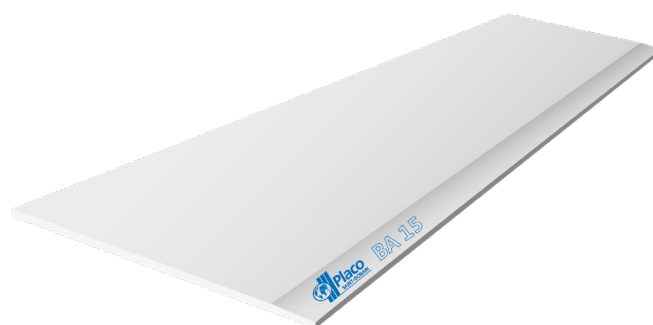

## Handling

During the unloading, the aperture of the forks of the forklift should be a minimum of 1/3 of the length of the board being handled, always placing the load in the centre of the forks on the forklift. Special care is advised for handling 3,000 mm boards.



Characteristic	Value
Norms	EN 520, Gypsum plasterboards. Definitions, requirements and test methods
Board thickness	15 mm
Board Thickness Tolerance	± 0.5 mm
Board liner color	Ivory
Board reverse color	Grey
Long Edge Type	Tapered Edge (TE)
Short Edge Type	Square Edge (SE)
Thermal conductivity	0.25 W/m.K
Water vapour diffusion factor $\mu$	10
Fire Reaction (EN Standard)	A2-s1, d0
CE board type designation	A
Approximate weight per m <sup>2</sup>	9.8 kg/m <sup>2</sup>
Flexural breaking load longitudinal	≥ 650 N
Flexural breaking load transversal	≥ 250 N

Length (mm)	Width (mm)	Packaging Boards/Pallet
2000 <sup>1</sup>	1200 <sup>2</sup>	30
2500 <sup>1</sup>	1200 <sup>2</sup>	30
2600 <sup>1</sup>	1200 <sup>2</sup>	30
2700 <sup>1</sup>	1200 <sup>2</sup>	30
2800 <sup>1</sup>	1200 <sup>2</sup>	30
3000 <sup>1</sup>	1200 <sup>2</sup>	30

<sup>1</sup> Tolerance of length (mm): + 0/-5

<sup>2</sup> Tolerance of width (mm): +0/-4



This information and, in particular, the recommendations relating to the application and use of the product, are based on the current technical knowledge and experience of SAINT-GOBAIN PLACO IBERICA S.A. of its products, which must be correctly stored, handled and installed within their useful life. The terms of the General Conditions of Sale and Supply of Saint-Gobain Placo S.A. apply to all orders. SAINT-GOBAIN PLACO IBERICA S.A. reserves the right to change the technical specifications of the product without prior notice. It is the user's responsibility to find out and use the latest and updated version of the product data sheets, a copy of which will be sent to those who request it. The content of this document is not exhaustive. Saint-Gobain Placo S.A. accepts no responsibility in the event of the use of our products in a way that does not conform to the instructions supplied by Saint-Gobain Placo S.A. Within the legal limits, Saint-Gobain Placo S.A. will not be responsible for loss of profit or indirect damages.