



PLACO® BA 10 1200 Boards



Application


Construction of interior drywall systems: wall partitions and self-supporting cladding, continuous ceilings and decorative elements.

Storage and conservation

Store the boards on flat surfaces and never outdoors, keeping them covered, away from sunlight and rain. Maximum stacking of the boards: 6 pallets.

Conditions of installation

Consult Placo® Installation Manual.

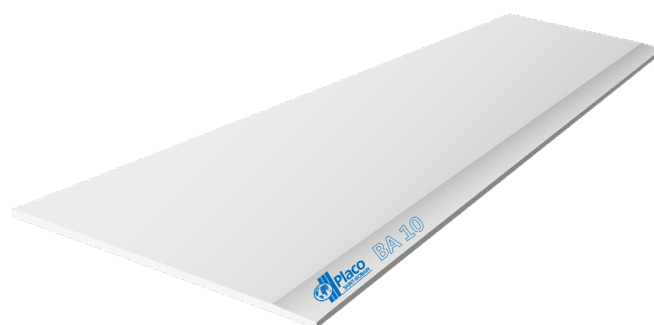

Handling

During the unloading, the aperture of the forks of the forklift should be a minimum of 1/3 of the length of the board being handled, always placing the load in the centre of the forks on the forklift. Special care is advised for handling 3,000 mm boards.

Characteristic	Value
Norms	EN 520, Gypsum plasterboards. Definitions, requirements and test methods
Board thickness	9.5 mm
Board Thickness Tolerance	± 0.5 mm
Board liner color	Ivory
Board reverse color	Grey
Long Edge Type	Tapered Edge (TE)
Short Edge Type	Square Edge (SE)
Thermal conductivity	0.25 W/m.K
Water vapour diffusion factor μ	10
Fire Reaction (EN Standard)	A2-s1, d0
CE board type designation	A
Approximate weight per m ²	7.2 kg/m ²
Flexural breaking load longitudinal	≥ 400 N
Flexural breaking load transversal	≥ 160 N

Length (mm)	Width (mm)	Packaging Boards/Pallet
2400 ¹	1200 ²	48
2500 ¹	1200 ²	48

¹ Tolerance of length (mm): +0/-5

² Tolerance of width (mm): +0/-4

