



PLACO® BA ACTIV' AIR® 13 1200

Boards



Product Description

Laminated plasterboard with double-sided cardboard and natural gypsum core, 12.5 mm thick and 1200 mm wide, with tapered longitudinal edges, incorporating Activ' Air® technology to improve indoor air quality.

Application


Construction of interior drywall systems: partition walls, self-supporting wall cladding, continuous ceilings and decorative elements. Its Activ' Air® technology contributes to improving indoor air quality.

Storage and conservation

Store the boards on flat surfaces and never outdoors, keeping them covered, away from sunlight and rain. Maximum stacking of the boards: 6 pallets.

Conditions of installation

Consult Placo® Installation Manual.

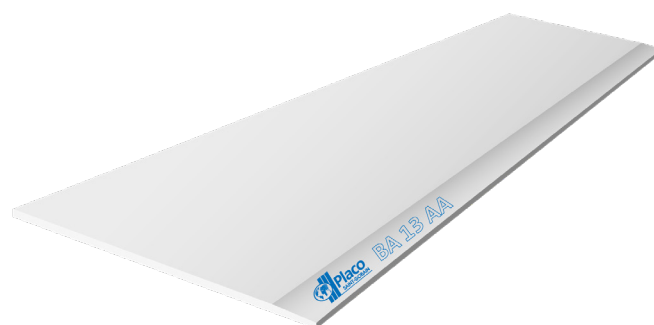

Handling

During unloading, the forklift's forks must be open to at least 1/3 of the length of the panel being handled. Always centre the load on the forklift forks. Special care is recommended for 3,000 mm boards.

PLACO® BA ACTIV' AIR® 13 1200

Characteristic	Value
Norms	EN 520, Gypsum plasterboards. Definitions, requirements and test methods
Board thickness	12.5 mm
Board Thickness Tolerance	± 0.5 mm
Board liner color	White
Board reverse color	Grey
Long Edge Type	Tapered Edge (TE)
Short Edge Type	Square Edge (BC)
Thermal conductivity	0.25 W/m.K
Water vapour diffusion factor μ	10
Fire Reaction (EN Standard)	A2-s1, d0
CE board type designation	A
Approximate weight per m ²	8.1 kg/m ²
Flexural breaking load longitudinal	≥ 550 N
Flexural breaking load transversal	≥ 210 N

Length (mm)	Width (mm)	Packaging Boards/Pallet
2500 ¹	1200 ²	36
3000 ¹	1200 ²	36

¹ Length tolerance (mm): +0/-5

² Width tolerance (mm): +0/-4

