


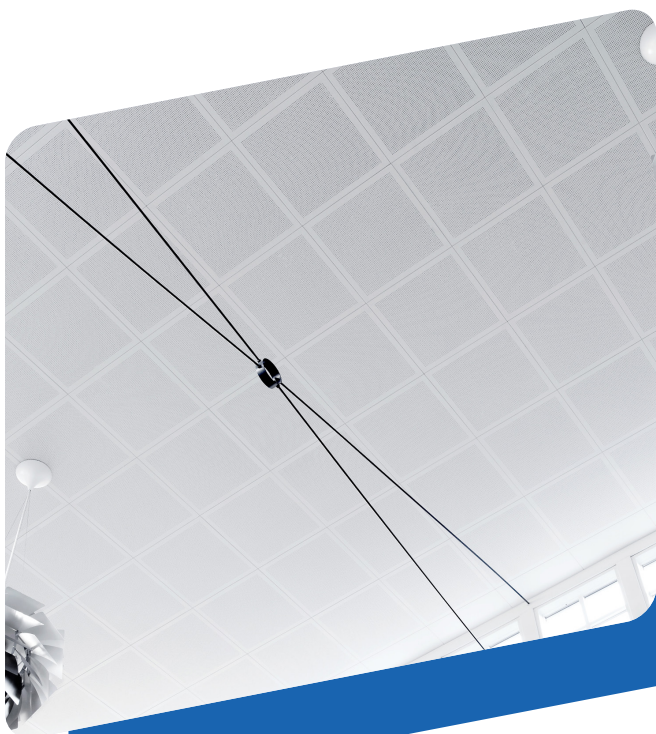

PLACO® PERFIL U (AxBxA)


Accessories

Product Description

Metal profiles in galvanised steel manufactured using the cold-rolling process and pre-lacquered in white RAL 9010* for use in suspended ceilings.

Handling

The use of Category 4 cut resistant gloves is recommended.

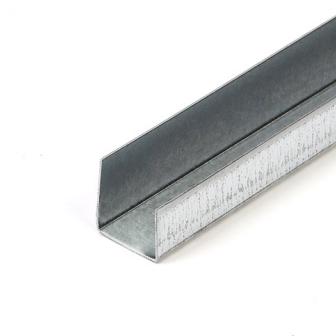

PLACO® PERFIL U (AxBxA)

Characteristic

Norms

Fire Reaction (EN Standard)

Value

EN 13964,Suspended ceilings. Requirements and test methods

A1

Dimen- sions (mm) Length

3000

Packaging

12 Piece/Box

