



PLACO® PIP 13 1200 Boards



Product Description

Laminated Gypsum Plasterboard with cardboard on both sides, 12.5 mm thick and 1.200 mm wide, manufactured using a continuous lamination process, and additivated conveniently to achieve better robust performances.

Application


Construction of interior drywall systems: wall lining/partitions, self-supporting cladding and continuous ceilings. It will be used mostly in systems installed when high performances in surface hardness are required.

Storage and conservation

Store the boards on flat surfaces and never outdoors, keeping them covered, away from sunlight and rain. Maximum stacking of the boards: 6 pallets.

Conditions of installation

Consult Placo® Installation Manual.

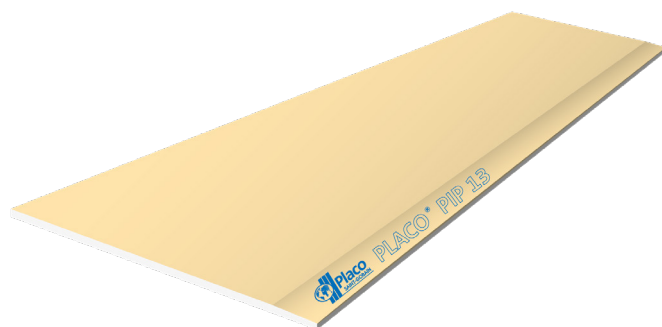

Handling

During the unloading, the aperture of the forks of the forklift should be a minimum of 1/3 of the length of the board being handled, always placing the load in the centre of the forks on the forklift. Special care is advised for handling 3,000 mm boards.

Characteristic	Value
Norms	EN 520, Gypsum plasterboards. Definitions, requirements and test methods
Board thickness	12.5 mm
Board Thickness Tolerance	± 0.5 mm
Board liner color	Yellow
Board reverse color	Grey
Long Edge Type	Tapered Edge (TE)
Short Edge Type	Square Edge (SE)
Thermal conductivity	0.25 W/m.K
Surface Hardness	Diameter of indentation ≤ 15 mm
Water vapour diffusion factor μ	10
Fire Reaction (EN Standard)	A2-s1, d0
CE board type designation	D, I, F
Approximate weight per m ²	11.9 kg/m ²
Flexural breaking load longitudinal	≥ 550 N
Flexural breaking load transversal	≥ 210 N

Length (mm)	Width (mm)	Packaging Boards/Pallet
2500 ¹	1200 ²	30

¹ Tolerance of length (mm): +0/-5

² Tolerance of width (mm): +0/-4

