



PLACO® PPAN 5A

Boards



Application


Construction of dry construction systems indoors: construction shelves and decorative elements.

Storage and conservation

Store the plates on flat surfaces and never outdoors, keeping them covered, protected from sunlight and rain.

Conditions of installation

Consult Placo® Installation Manual.

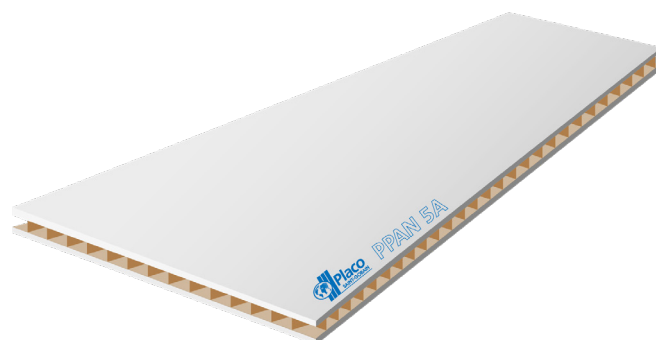

Handling

When the boards are transported using forklift trucks, the forks should be open as wide as possible.

Characteristic	Value
Norms	UNE-EN 13915, Prefabricated gypsum plasterboard panels with a cellular paper-board core - Definitions, requirements and test methods
Board thickness	49 mm
Board Thickness Tolerance	± 0.5 mm
Board liner color	Ivory
Board reverse color	Ivory
Long Edge Type	Squared Edge (SE)
Short Edge Type	Square Edge (SE)
Thermal conductivity	0.25 W/m.K
Water vapour diffusion factor μ	10
Fire Reaction (EN Standard)	B-s1, d0
CE board type designation	A
Approximate weight per m ²	15.5 kg/m ²

Length (mm)	Width (mm)	Packaging Boards/Pallet
2500 ¹	1200 ²	24

¹ 0 / -5

² Tolérance de largeur (mm): +0/-4

