



## PLACO® BA 13 600

Boards



### Product Description

Laminated Gypsum Plasterboard with cardboard on both sides and gypsum plaster core of natural origin with a thickness of 12.5 mm and a width of 600 mm which, due to its size, is ideal for use in Rehabilitation Works.

### Application


Construction of interior drywall systems: wall partitions and self-supporting cladding, continuous ceilings and decorative elements.

### Storage and conservation

Store the boards on flat surfaces and never outdoors, keeping them covered, away from sunlight and rain. Maximum stacking of the boards: 6 pallets.

### Conditions of installation

Consult Placo® Installation Manual.

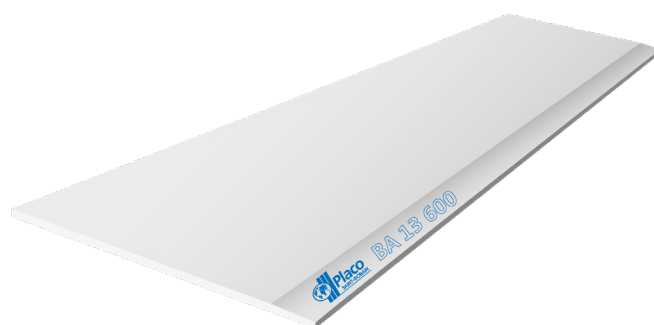

### Handling


During the unloading, the aperture of the forks of the forklift should be a minimum of 1/3 of the length of the board being handled, always placing the load in the centre of the forks on the forklift. Special care is advised for handling 3000 mm boards.

Characteristic	Value
Norms	EN 520, Gypsum plasterboards. Definitions, requirements and test methods
Board thickness	12.5 mm
Board Thickness Tolerance	± 0.5 mm
Board liner color	Ivory
Board reverse color	Grey
Long Edge Type	Tapered Edge (TE)
Short Edge Type	Squared Edge (SE)
Thermal conductivity	0.25 W/m.K
Water vapour diffusion factor $\mu$	10
Fire Reaction (EN Standard)	A2-s1, d0
CE board type designation	A
Approximate weight per m <sup>2</sup>	8.9 kg/m <sup>2</sup>
Flexural breaking load longitudinal	≥ 550 N
Flexural breaking load transversal	≥ 210 N

Length (mm)	Width (mm)	Packaging Boards/Pallet
2000 <sup>1</sup>	600 <sup>2</sup>	72
2500 <sup>1</sup>	600 <sup>2</sup>	72

<sup>1</sup> Tolerance of length (mm): +0/-5

<sup>2</sup> Tolerance of width (mm): +0/-4

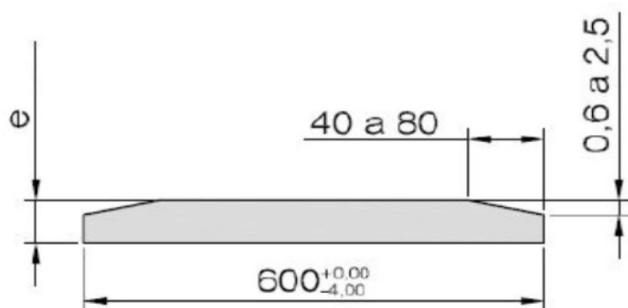

Cotas expresadas en mm.