



PLACO® MONTANTE 48-50 Reforzado

Metal profiles

Product Description

Galvanised steel profile, 48 mm wide, manufactured using a cold rolling process. Vertical element in the form of a “C” that fits into the R48 reinforced rails, forming the framework of the supporting structure of the partitions or self-supporting plasterboard cladding. They have holes in the core in the form of an inverted “U” for the passage of the installations through the interior of the wall.

Storage and conservation

Store on flat surfaces and never outdoors, keeping them covered and protected from sun and rain.

Conditions of installation

Consult both the Isover and Placo® Installer Manuals, as well as the Laminated Plasterboard Construction Solutions Manual.




Handling

The use of category 4 cut resistance gloves is recommended.

PLACO® MONTANTE 48-50 Reforzado

Characteristic	Value
Norms	EN 14195, Metal framing components for gypsum plasterboard systems - Definitions, requirements and test methods
Fire Reaction (EN Standard)	A1
Type of material	DX51D
Corrosion Protection Coating Class	Z140
Available lengths	2400, 2590, 2990, 3590, 3990
Length Tolerance	±3 mm
Weight per linear meter	0.7112 kg
Metal Thickness	0.6 mm
Thickness Tolerance	±0,05 mm
Moment of inertia	$I_x = 3,461 \text{ cm}^4$

a (mm)	b (mm)	c (mm)	d (mm)	Un/Package	Un/Pallet
46.80	51.00	49.00	5.00	10	360

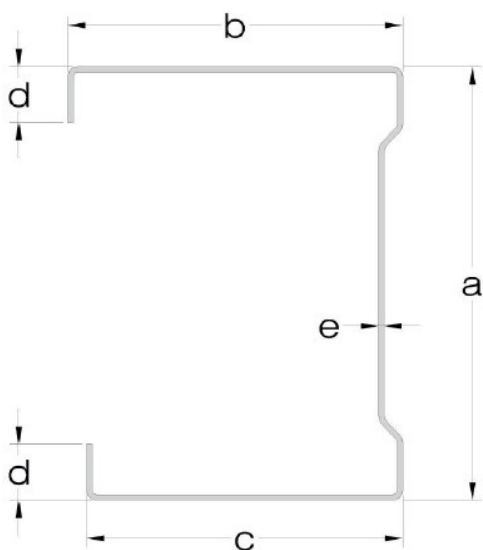

This information and, in particular, the recommendations relating to the application and use of the product, are based on the current technical knowledge and experience of SAINT-GOBAIN PLACO IBERICA S.A. of its products, which must be correctly stored, handled and installed within their useful life. The terms of the General Conditions of Sale and Supply of Saint-Gobain Placo S.A. apply to all orders. SAINT-GOBAIN PLACO IBERICA S.A. reserves the right to change the technical specifications of the product without prior notice. It is the user's responsibility to find out and use the latest and updated version of the product data sheets, a copy of which will be sent to those who request it. The content of this document is not exhaustive. Saint-Gobain Placo S.A. accepts no responsibility in the event of the use of our products in a way that does not conform to the instructions supplied by Saint-Gobain Placo S.A. Within the legal limits, Saint-Gobain Placo S.A. will not be responsible for loss of profit or indirect damages.

